

ARCHITECTURAL PROFILES



PROJECT

TYPE:

DATE:

NOTES:

FEATURES

The F50 series is our narrow Architectural Profile sports an aluminum body at 50mm wide. Ideal for commercial & residential spaces.

F50


MODEL	F50
DIMENSION	50mm
MOUNTING	Surface Mount/Suspension Mount/Wall Mount/Recessed Mount
STYLES	Regressed Anti-Glare/Regressed Arch
KELVINS	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	6" – 8"/Continuous Run*
LENS	Opal/Opal Dropped
LIGHT DIRECTIONS	Direct & Indirect
LUMEN PACKAGES	Standard 135LM/W, 7.5W/FT, @3500K High 150LM/W, 10W/FT, @3500K
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

CERTIFICATIONS



APPLICATIONS


SURFACE MOUNT

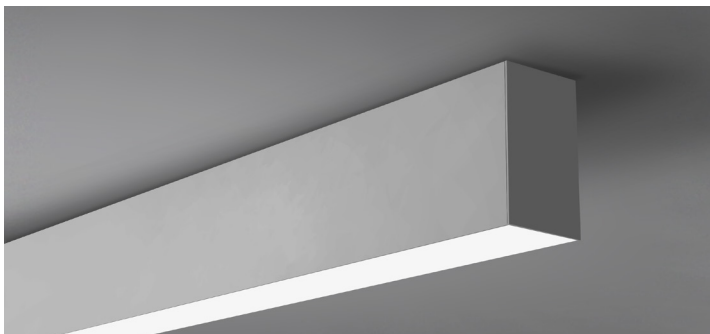


SUSPENSION MOUNT



RECESSED MOUNT

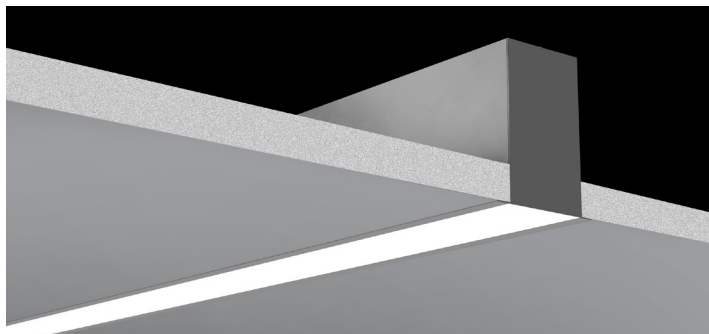


WALL MOUNT

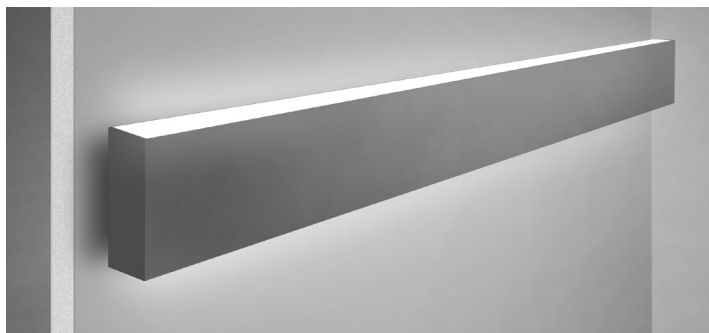

F50 SUSPENSION




MODEL F50	36104-017
DIMENSION	50mm x 75mm
MOUNTING	Suspension Mount
STYLE	Regressed Arch
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTH	6" – 8'/Continuous Run*
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard 135LM/W, 7.5W/FT, @3500K High 150LM/W, 10W/FT, @3500K
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

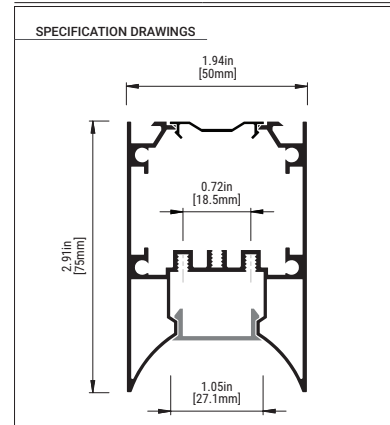

F50 SUSPENSION



MODEL F50	36134-014
DIMENSION	50mm x 107mm
MOUNTING	Suspension Mount
STYLE	Regressed Anti-Glare
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTH	6" – 8'/Continuous Run*
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard 135LM/W, 7.5W/FT, @3500K High 150LM/W, 10W/FT, @3500K
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

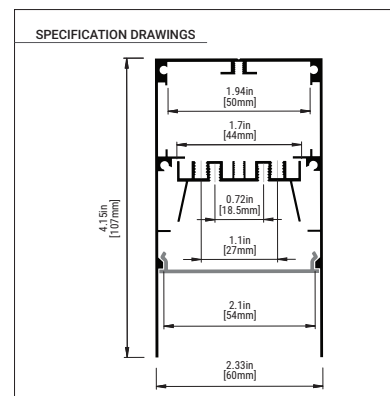

*PLEASE CONSULT FACTORY

ARCHITECTURAL PROFILES

LED Linear Lighting System


EUROfase
ARCHITECTURAL

33 West Beaver Creek Road,
Richmond Hill, Ontario, Canada

F50 SUSPENSION




MODEL F50	36070-015
DIMENSION	50mm x 75mm
MOUNTING	Suspension Mount
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTH	6" – 8"/Continuous Run*
LENS	Opal/Opal Dropped
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard 135LM/W, 7.5W/FT, @3500K High 150LM/W, 10W/FT, @3500K
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

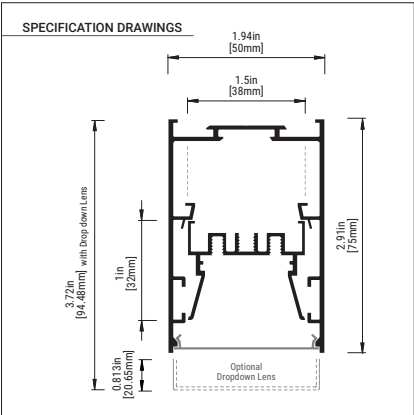

F50 SUSPENSION



MODEL F50	36121-014
DIMENSION	50mm x 120mm
MOUNTING	Suspension Mount
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTH	6" – 8"/Continuous Run*
LENS	Opal
LIGHT DIRECTION	Up & Downlight
LUMEN PACKAGES	Standard 135LM/W, 7.5W/FT, @3500K High 150LM/W, 10W/FT, @3500K
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

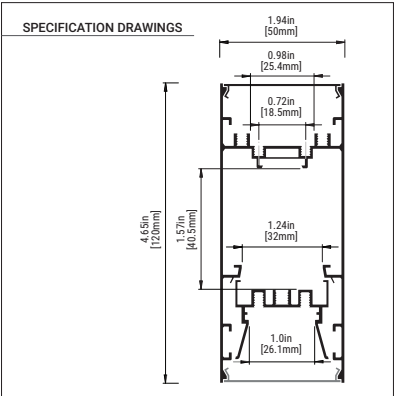


*PLEASE CONSULT FACTORY


F50 WALL MOUNT




MODEL F50	36121-014
DIMENSION	50mm x 120mm
MOUNTING	Wall Mount
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTH	6" – 8"/Continuous Run*
LENS	Opal
LIGHT DIRECTION	Up & Downlight
LUMEN PACKAGES	Standard 135LM/W, 7.5W/FT, @3500K High 150LM/W, 10W/FT, @3500K
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

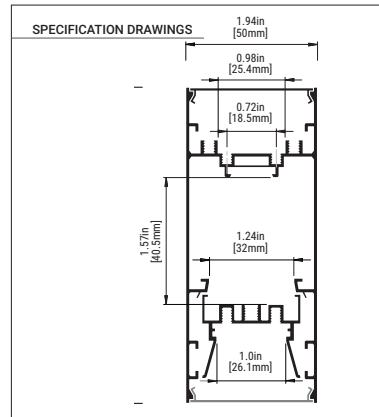

F50 RECESSED

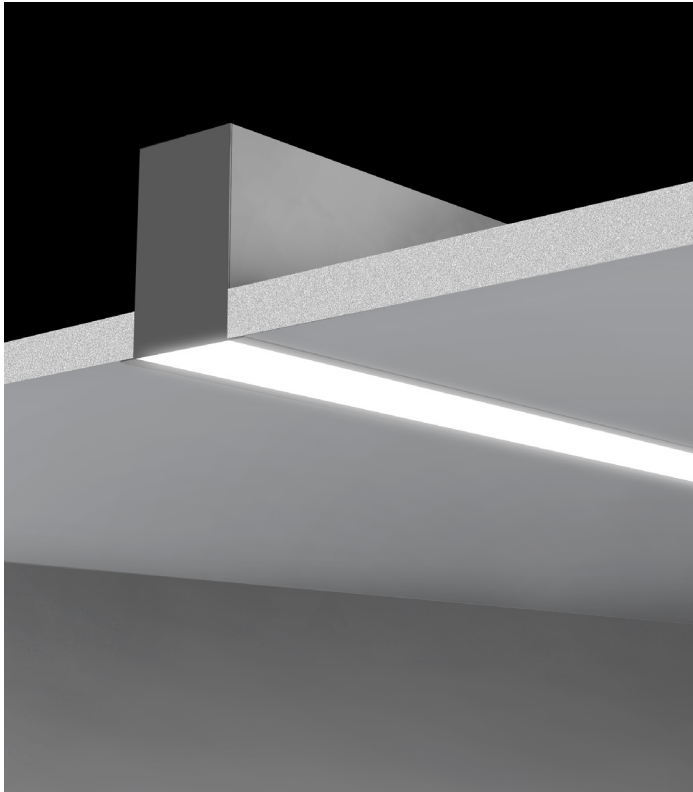

MODEL F50	36081-011
DIMENSION	50mm x 75mm
MOUNTING	Recessed Mount
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTH	6" – 8"/Continuous Run*
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard 135LM/W, 7.5W/FT, @3500K High 150LM/W, 10W/FT, @3500K
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)

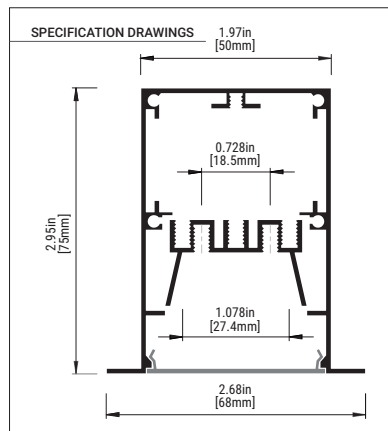

*PLEASE CONSULT FACTORY

ARCHITECTURAL PROFILES

LED Linear Lighting System

EUROfase
ARCHITECTURAL

33 West Beaver Creek Road,
Richmond Hill, Ontario, Canada

DRIVER OPTIONS


OS1	1% Dimming (0-10V)
TRI	TRIAC Dimmable LED Driver
TW	Tuneable White (1500K-6500K)
HL1	Lutron HI-LUME 1% 2-wire LED Driver
ES	Lutron Digital Ecosystem
5ES	5 Series Ecosystem; 5% Dimming
DTW	Dim To Warm

SAMSUNG BOARD TECHNICAL SPECIFICATION


MODEL	Samsung Breakaway 44 inch
POWER CONSUMPTION	31W
LUMINOUS FLUX	Standard: 4185lm @ 3500K High: 4650lm @ 3500K
LUMINOUS EFFICACY	Standard: 135lm/W High: 150lm/W


WIRE FEED POSITIONS

APPLICATION: RECESSED, WALL MOUNT

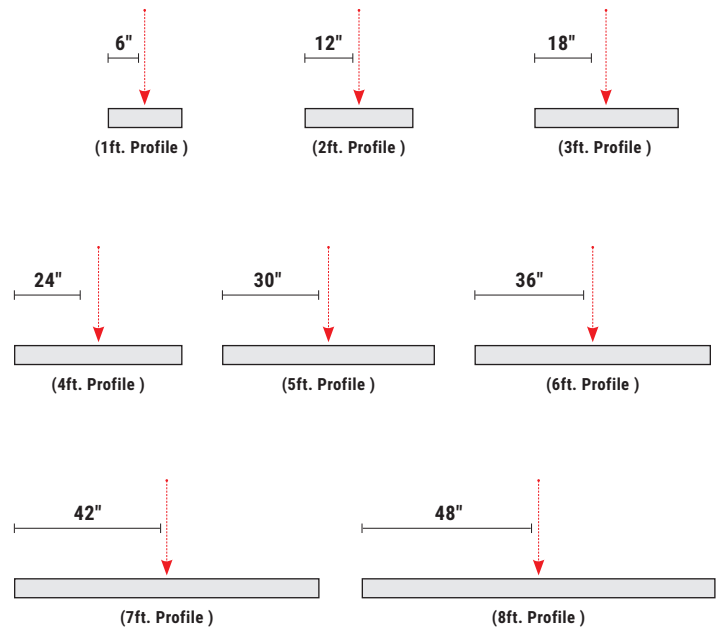

APPLICATION: SUSPENSION

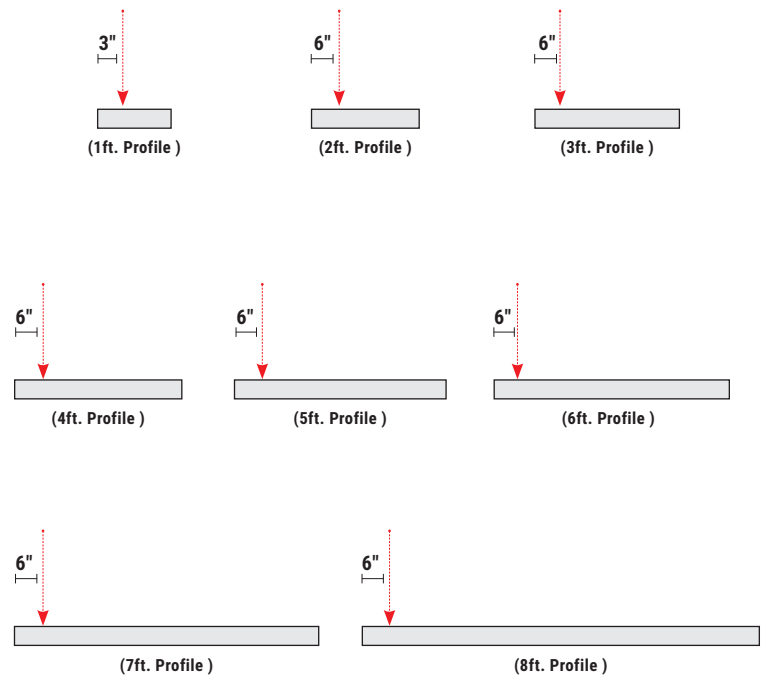

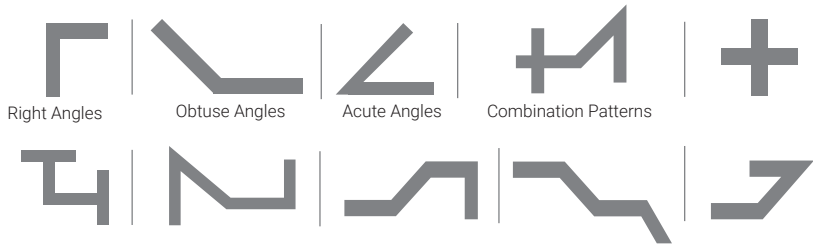

PATTERNS	
S - X	Square
R - XY	Rectangle
U - XYZ	U-Shape
L - XY	L-Shape
C	Custom Pattern

Standard Patterns Minimal Lengths			
Square	Rectangle	U-Shape	L-Shape
X = 23" min. Y = 23" min.		X = 23" min. Y = 23" min. Z = 23" min.	X = 23" min. Y = 23" min.

Custom Patterns	Corner
	All corners are mitre cut and customizable to any degree.
"T"	"X"

